


OVERLAY ROLLER SHUTTERS



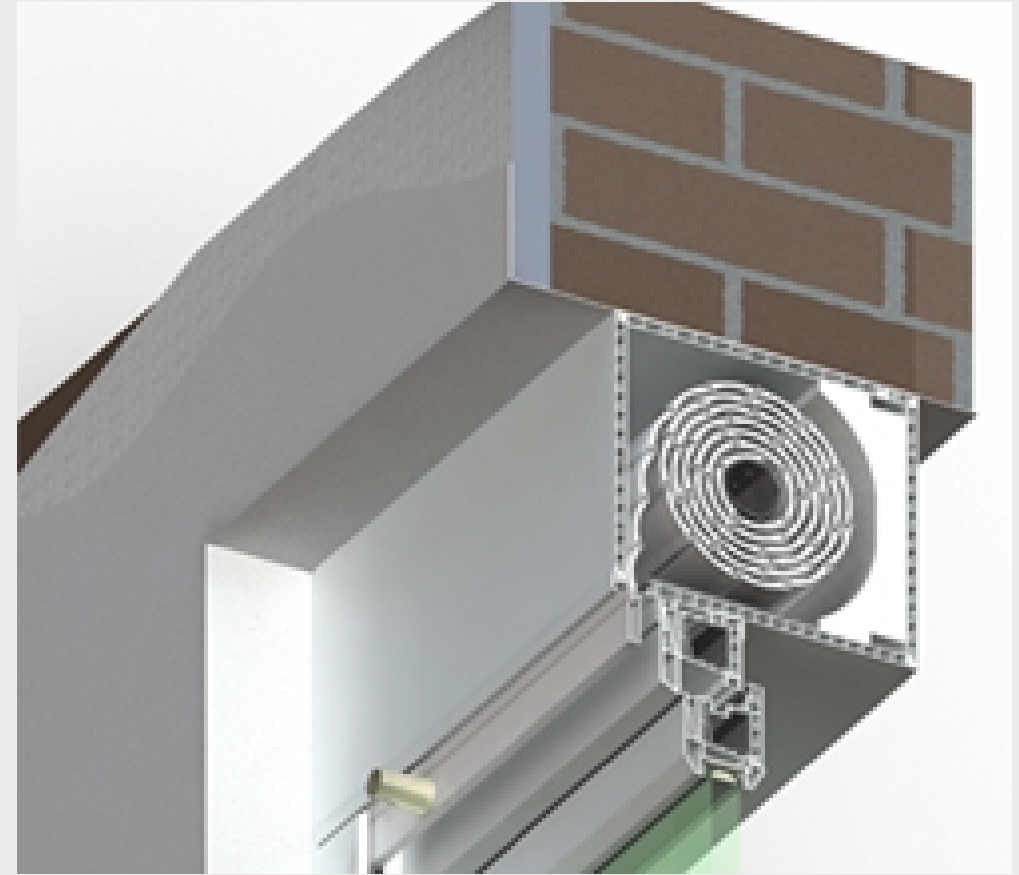

OVERLAY ROLLER SHUTTERS

Technical specifications:

160mm or 200mm PVC box depending on the height;

Aluminum slat apron (double-walled lacquered aluminum slats 39, 45, 55 or 77 mm, polyurethane foam filling), standard PVC guides or aluminum on request for aluminum carpentry;

Final slat in extruded and lacquered aluminium, fitted with a rubber seal; The boxes and the side guides are protected by a adhesive sheet that can be removed during laying or after;

Types of operation: manual (with strap or crank), wired (with switch), radio (with remote control);

All elements are dyed in an electrostatic field.

The motorization is Somfy ASA of 10, 13, 15, 20 newtons, depending on the dimensions.